

RE:FELT



PET FELT PANELS

PRODUCT SHEET



T +31 (0) 262 062 102
E info@refelt.nl
W refelt.nl

ReFelt provides acoustic PET Felt panels that are made from recycled plastic bottles. It is a soft yet strong and durable material. Offering incredible sound-dampening qualities and aesthetically many possibilities.

SPECIFICATIONS

Material

PET Felt

Flammability class

B1

Acoustic properties

NRC : 0.80 with 100 mm cavity

NRC : 0.65 with 50 mm cavity

ISO Certificate

345-2003

Density

1,9 kg/m²

MEASUREMENTS

The PET Felt panels are
2440 mm x 1220 mm x 9 mm
gross size. One panels weighs
approximately 5,7 kg.

PET FELT

PET Felt is made from recycled
plastic bottles turned into a soft
yet sturdy felt material. It is long
lasting, UV stabilized and sound-
dampening. PET Felt is both
recycled and recyclable.

COLOURS


Slight colour deviations can occur
since the PET Felt panels are made
from recycled fibers. The panels
have a frontside and a backside
because the fibers are differently
orientated on both sides, the nap
direction. Keep in mind to apply
the panels in the same direction
and use the same side during the
installation to avoid alterations in
appearance.



DOWNLOADS

Care and maintenance
instructions, 3D files and test
certificates are available at refelt.nl.

AVAILABLE IN 28 COLOUR BLENDS



Dark Blue




Dark Green



Green




Lime




Cobalt



Denim



Blue




Sky




Grape



Violet




Frost



Smoke



Black




Dark Grey




Grey



Light Grey




Sand



Beige



Marble




White




Yellow




Orange




Honey



Camel




Coconut




Wine



Red







Cinnamon

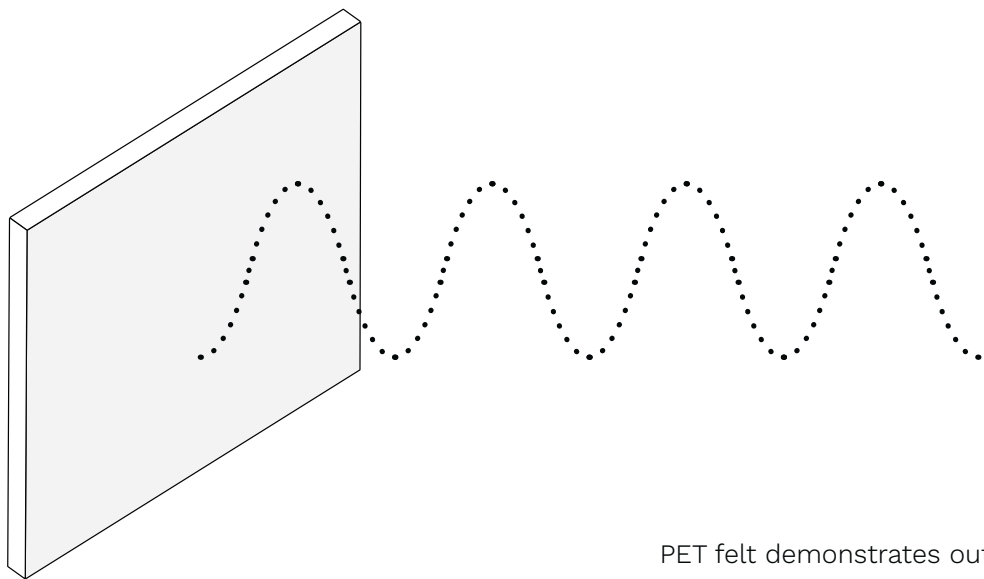


PET felt demonstrates outstanding acoustic performance. It is a perfect material to apply on walls or ceilings in order to decrease sound reverberating. Using the panels for acoustic purposes, please, keep the test results in mind to achieve a desirable result.

! For detailed technical information about the acoustic properties of the ReFelt PET Felt panels, please have a look at the Peutz Certificate available at refelt.nl.

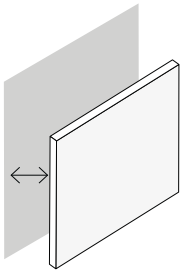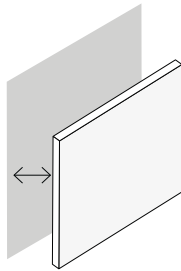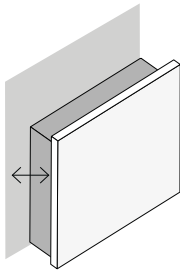				
	1 Layer	Cavity 50 mm	Cavity 100 mm	Cavity 50 mm stone wool 50 mm
NRC (100-5000 Hz)	0.30	0.65	0.80	1.00
aw (100-5000 Hz)	0.25	0.50	0.85	1.00

NRC = Noise reduction coefficient
aw = Sound absorption coefficient

3. PROCESSING

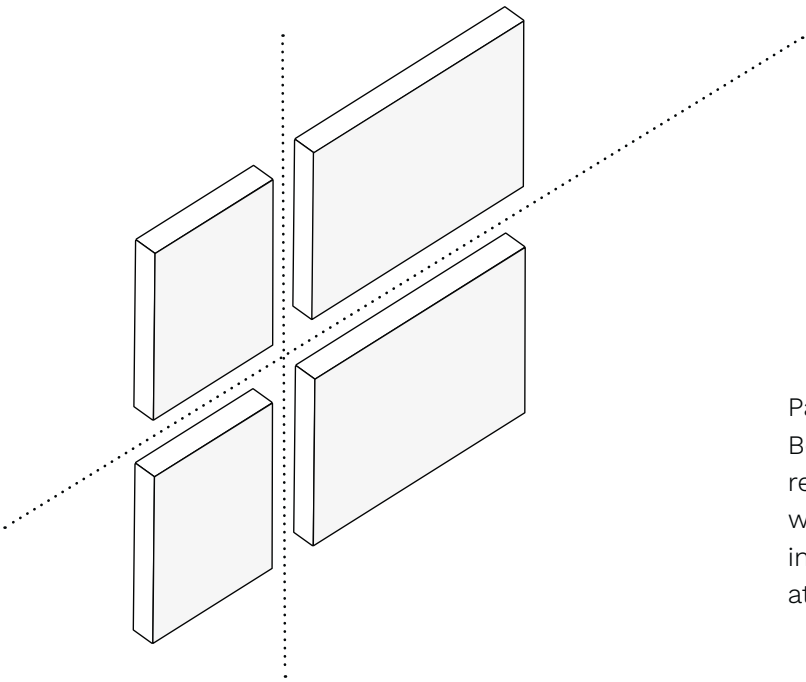




Panels can be processed in multiple ways. Before designing, it is recommended to review the different methods for production with their pro's and con's. For more detailed information a processing manual is available at refelt.nl.

PROS & CONS

Method	Pro's	Con's
Digital Cutting	Precise	Expensive for large volumes
Waterjet Cutting	Precise	Programming costs, dry time after processing
Laser Cutting	Precise	Heat can melt and discolor the edges
Die Cutting	Suitable for large-volume productions	Expensive for small volumes (requires a die)
Manual Cutting	Suitable for on-site adjustments	Not precise enough for complex shapes
Circular saw	Suitable for simple and straight shapes	Not precise enough for complex shapes
Jigsaw	Suitable for freeform shapes or cut-outs	Depends on experience working with the tool



RE:FELT

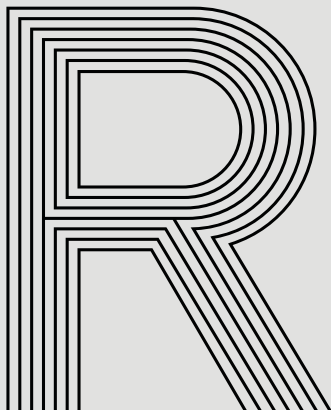

Witteveen Projectinrichting
Ouderkerk a/d Amstel
Tel: 020 - 496 5030
info@witteveen.nl
www.scheidingswand.net
www.project-inrichting.nl

T +31 (0) 262 062 102
E info@refelt.nl
W refelt.nl

