

Environmental product declaration

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Publisher:

Declaration number:

Registration number:

ECO Platform reference number:

Issue date:

Valid to:

Flokk AS

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-4141-3375-EN

NEPD-4141-3375-EN

-

30.12.2022

30.12.2027

HÅG Tion

Flokk AS

www.epd-norge.no

Flol: l:





Witteveen Projectinrichting Ouderkerk a/d Amstel Tel: 020 - 496 5030 info@witteveen.nl www.ergo-burostoel.nl www.project-inrichting.nl





General information

Product:

HÅG Tion

Owner of the declaration:

Flokk AS

Contact person: Atle Thiis-Messel Phone: 0047 98 25 68 30 e-mail: atle.messel@flokk.com

Program operator:

The Norwegian EPD Foundation Pb. 5250 Majorstuen, 0303 Oslo Phone: +47 23 08 80 00 e-mail: post@epd-norge.no

Manufacturer:

Flokk AS

Drammensveien 145, 0277 Oslo Norway

Declaration number:

NEPD-4141-3375-EN

Place of production:

Flokk - Røros Sundveien N-7374 Røros

Norway

Management system:

ISO 14001, ISO 9001, ISO 50001(Norway, Sweden)

ECO Platform reference number:

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture

Organisation no:

No 928 902 749

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Issue date:

30.12.2022

Valid to:

30.12.2027

Declared unit:

1 Pcs HÅG Tion

A1,A2,A3,A4

Year of study:

Comparability:

EPDs from programmes other than the Norwegian EPD Foundation may not be comparable

Declared unit with option:

Functional unit:

HÅG Tion 2100 (including knock down packaging)

Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Developer of EPD:

Kenneth Dam Lindegaard Knudsen

Reviewer of company-specific input data and EPD:

Atle Thiis-Messel

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Approved:

Sign

Erik Svanes, Norsus AS

(no signature required)

Håkon Hauan, CEO EPD-Norge

| Key environmental indicators | Unit | Cradle to gate A1 - A3 |
|------------------------------|------------|------------------------|
| Global warming | kg CO2 eqv | 40,73 |
| Total energy use | MJ | 599,98 |
| Amount of recycled materials | % | 68,84 |



Product

Market:

Worldwide

Product description:

The HÅG Tion is an activity chair that embraces the freedom to work just about anywhere, equipped with only the most necessary features for a simple work chair. The HÅG Tion has an honest design and is easy to re-furbish.

HÅG Tion is at the forefront of sustainable design, made using recycled plastic, aluminium and steel, ethically sourced woods, and without any toxic chemicals – making it one of our most sustainable design to date. With its collection on diversity and the possibility to design the perfect chair for you, the HÅG Tion is a chair that fits everyone anywhere.

(HÅG Tion 2100):

Chair height: 802-936 mm (with gas lift 150 mm)

Chair width: 464 mm Chair depth: 505 mm

Product specification

The model studied in detail in this declaration is the HÅG Tion 2100 with seat and back plastic shells and its knock down packaging option, Packaging 1.

The seat and back plastic shells, in any colors, consists of 94% post-consumer recycled polypropylene (PP) coming from European waste stream, including household waste.

The key environmental indicators for the other models of the HÅG Tion collecton are presented on a table page 8 of this declaration.

Technical data:

Total weight: 10,99 kg (packaging excluded) Total weight: 13,68 kg (packaging included)

Reference service life, product

Reference service life, building

| Materials | kg | % | Recycled share in material (kg) | Recycled share in material (%) |
|---|-------|-------|---------------------------------|--------------------------------|
| Others | 0,02 | 0,15 | 0,00 | 0,80 |
| Metal - Aluminium | 6,36 | 46,45 | 6,16 | 96,99 |
| Metal - Steel | 1,75 | 12,79 | 0,02 | 1,05 |
| Glass fibre | 0,01 | 0,04 | 0,01 | 100,00 |
| Packaging - Cardboard | 1,20 | 8,74 | 0,00 | 0,00 |
| Plastic - Polyurethane (PUR) | 0,15 | 1,08 | 0,00 | 0,00 |
| Plastic - Polypropylene (PP) | 2,19 | 16,02 | 1,84 | 84,14 |
| Plastic - Polyoxymethylene (POM) | 0,13 | 0,94 | 0,00 | 0,00 |
| Rubber, synthetic | 0,21 | 1,54 | 0,00 | 0,00 |
| Packaging - Plastic | 0,08 | 0,56 | 0,00 | 0,00 |
| Powder coating | 0,13 | 0,94 | 0,00 | 0,00 |
| Plastic - Nylon (PA) | 0,05 | 0,33 | 0,00 | 0,00 |
| Plastic - Polyamide with glass fibre (PAGF30) | 0,02 | 0,11 | 0,00 | 0,00 |
| Plastic - Polyethylene (HDPE) | 0,01 | 0,04 | 0,00 | 0,00 |
| Packaging - Paper | 0,02 | 0,12 | 0,00 | 0,00 |
| Packaging - Recycled cardboard | 1,39 | 10,13 | 1,39 | 100,00 |
| Total: | 13,68 | | 9,42 | |

LCA: Calculation rules

Declared unit:

1 Pcs HÅG Tion

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Data quality:


Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.



System boundary:

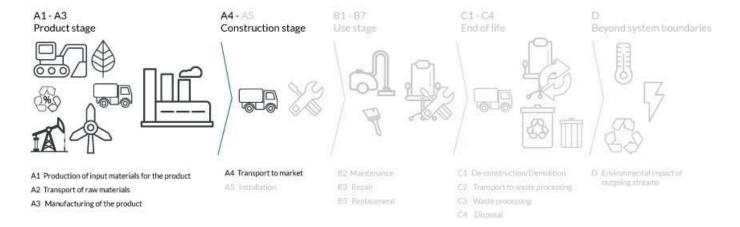

Additional technical information:

Product specification (HÅG Tion 2100):

Chair height: 802-936 mm (with gas lift 150 mm)
Chair width: 464 mm
Chair depth: 505 mm



Unit

Value

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

| Туре | Capacity utilisation (incl. return) % | Type of vehicle | Distance km | Fuel/Energy consumption | Unit | Value (I/t) |
|----------------------|---------------------------------------|-------------------------------|-------------|----------------------------|-------|-------------|
| Truck | 55,0 % | Truck, over 32 tonnes, EURO 5 | 1000 | 0,022823 | l/tkm | 22,82 |
| Railway | | | | | l/tkm | |
| Boat | | | | | l/tkm | |
| Other Transportation | | | | | l/tkm | |

Use (B1)

| | Unit | Value |
|-----------------------------------|----------------|-------|
| Auxiliary | kg | |
| Water consumption | m ³ | |
| Electricity consumption | kWh | |
| Other energy carriers | MJ | |
| Material loss | kg | |
| Output materials fr ste treatment | kg | |
| Dust in the air | kg | |
| VOC emissions | kg | |

| l | |
|---|-------------------------------------|
| | Replacement (B4)/Refurbishment (B5) |

| • | Unit | Value |
|-------------------------|---------------|-------|
| Maintenance cycle* | O'CO. | |
| Auxiliary | cha. | |
| Other resources | 411 | 00 |
| Water consumption | Scenari m3 | AF. |
| Electricity consumption | kWh | .16 |
| Other energy carriers | MJ | |
| Material loss | kg | |
| VOC emissions | kg | |

| | Unit | Value |
|---------------------------|------|-------|
| Replacement cycle* | | |
| Electricity consumption | kWh | |
| Replacement of worn parts | | |
| | | |

* Described above if relevant

Operational energy (B6) and water consumption (B7)

| | Unit | Value |
|---------------------------|----------------|-------|
| Water consumption | m ³ | |
| Electricity consumption | kWh | |
| Other energy carriers | MJ | |
| Power output of equipment | kW | |

| Described above it relevant | | |
|---|------------|-------|
| | | |
| | | |
| 77.4 | | |
| 40 | | |
| dra | | |
| - · · · · · · · · · · · · · · · · · · · | | |
| End of Life (C1, C 10) | | |
| | | |
| 1/201 | Unit | Value |
| Hazardous waste disposed // C/// | Unit kg | Value |
| Hazardous waste disposed Collected as mixed construction was | 8-6-6-6 | Value |
| Hazardous waste disposed Collected as mixed construction was. Reuse | kg | Value |
| Hazardous waste disposed Collected as mixed construction was. Reuse Recycling | kg kg | Value |
| End of Life (C1, Pot included Collected as mixed construction was Recycling Energy recovery | kg kg | Value |

Transport to waste processing (C2)

| Туре | Capacity utilisation (incl. return) % | Type of vehicle | Distance km | Fuel/Energy consumption | Unit | Value (I/t) |
|----------------------|---|-----------------|-------------|----------------------------|-------|-------------|
| Truck | | | | | I/tkm | |
| Railway | | | | | I/tkm | |
| Boat | | | | | I/tkm | |
| Other Transportation | | | | | I/tkm | |



LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

| | Product stage Construction installation stage | | | | User stage | | | | | | End of life stage . | | | Beyond the system bondaries | | | |
|---|---|-----------|---------------|-----------|------------|-----|-------------|--------|-------------|---------------|------------------------------|--------------------------|-----------------------------------|-----------------------------|---------------------|----------|--|
| | Raw materials | Transport | Manufacturing | Transport | Assembly | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De- construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery- Recycling- potential |
| ľ | A1 | A2 | A3 | A4 | A5 | B1 | B2 | В3 | B4 | B5 | В6 | В7 | C1 | C2 | C3 | C4 | . D |
| ſ | Х | Х | Х | Х | | | | | | | | | | | | | |

Environmental impact

| Parameter | Unit | A1 | A2 | A3 | A4 |
|-----------|--------------------------------------|----------|----------|----------|----------|
| GWP | kg CO ₂ -eq | 3,87E+01 | 1,68E+00 | 3,75E-01 | 1,19E+00 |
| ODP | kg CFC11 -eq | 2,06E-06 | 3,23E-07 | 1,72E-08 | 2,33E-07 |
| POCP | kg C ₂ H ₄ -eq | 1,22E-02 | 2,69E-04 | 9,54E-05 | 1,93E-04 |
| АР | kg SO ₂ -eq | 1,59E-01 | 5,49E-03 | 2,05E-03 | 3,88E-03 |
| EP | kg PO ₄ ³eq | 5,03E-02 | 9,21E-04 | 7,82E-04 | 6,51E-04 |
| ADPM | kg Sb -eq | 2,34E-03 | 3,72E-06 | 1,31E-05 | 2,69E-06 |
| ADPE | MJ | 3,84E+02 | 2,60E+01 | 2,16E+00 | 1,87E+01 |

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Resource use

| Parameter | Unit | A1 | A2 | A3 | A4 |
|-----------|----------------|-----------|----------|----------|----------|
| RPEE | MJ | 6,19E+01 | 4,71E-01 | 6,51E+01 | 3,39E-01 |
| RPEM | MJ | 1,93E+01 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| TPE | MJ | 8,12E+01 | 4,71E-01 | 6,51E+01 | 3,39E-01 |
| NRPE | MJ | 4,42E+02 | 2,68E+01 | 4,07E+00 | 1,93E+01 |
| NRPM | MJ | 2,91E+01 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| TRPE | MJ | 4,71E+02 | 2,68E+01 | 4,07E+00 | 1,93E+01 |
| SM | kg | 9,42E+00 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| RSF | MJ | 4,86E-02 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| NRSF | MJ | -1,44E-03 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| W | m ³ | 4,09E-01 | 6,30E-03 | 1,31E-02 | 4,55E-03 |

RPEE Renewable primary energy resources used as energy carrier, RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

End of life - Waste

| Parameter | Unit | A1 | A2 | A3 | A4 |
|-----------|------|----------|----------|----------|----------|
| HW | kg | 6,02E-02 | 1,43E-05 | 1,97E-02 | 1,03E-05 |
| NHW | kg | 2,39E+01 | 2,42E+00 | 3,23E-01 | 1,75E+00 |
| RW | kg | INA* | INA* | INA* | INA* |

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed

End of life - Output flow

| · | | | | | |
|-----------|------|----------|----------|----------|----------|
| Parameter | Unit | A1 | A2 | A3 | A4 |
| CR | kg | 1,11E-05 | 0,00E+00 | 0,00E+00 | 0,00E+00 |
| MR | kg | 3,53E-02 | 0,00E+00 | 2,47E+00 | 0,00E+00 |
| MER | kg | 1,46E-01 | 0,00E+00 | 2,42E-03 | 0,00E+00 |
| EEE | MJ | INA* | INA* | INA* | INA* |
| ETE | MJ | INA* | INA* | INA* | INA* |

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

| Electricity mix | Data source | Amount | Unit |
|--|------------------|--------|---------------|
| Energy, electricity, hydro, Nordic average:1 kWh | Østfoldforskning | 10,19 | g CO2-ekv/kWh |

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

GREENGUARD Gold certified

Additional environmental information

Key environmental indicators for variants for this EPD: Cradle to Gate analyse from A1 to A3

| Variant number | Global warming (kg CO2) | Total energy use (MJ) | Share of recycled material in |
|--|----------------------------|-----------------------|----------------------------------|
| HÅG Tion 2100 - Plastic chair - No packaging | 35,74 | 539,73 | product(%) |
| HÅG Tion 2140 - Plastic chair, upholstery seat (Cura/Gabriel) - No packaging | 36,40 | 552,60 | 73,11 |
| HÅG Tion 2160 - Plastic chair, upholstery seat/back (Cura/Gabriel) - No | 36,97 | 562,01 | 72,33 |
| packaging HÅG Tion 2200 - Wooden chair - No packaging | 32,72 | 465,64 | 73,24 |
| Håg Tion 2240 - Wooden back, upholstery plastic seat (Cura/Gabriel) - No | 34,96 | 495,66 | 53,22 |
| packaging | | | 64,10 |

Key environmental indicators for options for this EPD: Cradle to Gate analyse from A1 to A3

| Option number | Global warming (kg CO2) | Total energy use (MJ) | Share of recycled material in product(%) |
|---|----------------------------|-----------------------|--|
| HÅG Tion Footring | 9,80 | 118,44 | 75,01 |
| HÅG Tion Armrests - Painted | 7,11 | 89,55 | 89,26 |
| HÅG Tion Armrests - Polished | 6,14 | 71,64 | 96,22 |
| HÅG Tion - Packaging 1 (Small box, flat packed - used in declared unit) | 5,00 | 60,42 | 51,41 |
| HÅG Tion - Packaging 2 (Large box, fully assembled) | 7,06 | 84,86 | 66,95 |

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

lversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

 $NPCR\,026\,Part\,B\,for\,Furniture.\,Ver.\,2.0\,October\,2018,\,EPD\text{-}Norge.$

| © epd-norway Global Program Operator | Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo,Norway | Phone: e-mail: web: | +47 23 08 80 00 post@epd-norge.no www.epd-norge.no |
|--------------------------------------|--|---------------------------|--|
| lilol:l: | Owner of the declaration | Phone: | 0047 98 25 68 30 |
| | Flokk AS | e-mail: | atle.messel@flokk.com |
| | Drammensveien 145, 0277 Oslo | web: | https://www.flokk.com |
| LCA no | Author of the Life Cycle Assessment | Phone: | +47 916 50 916 |
| | LCA.no AS | e-mail: | post@lca.no |
| | Dokka 6B 1671 Kråkerøy | web: | www.lca.no |
| (LCA) | Developer of EPD generator | Phone: | +47 916 50 916 |
| | LCA.no AS | e-mail: | post@lca.no |