


© Society







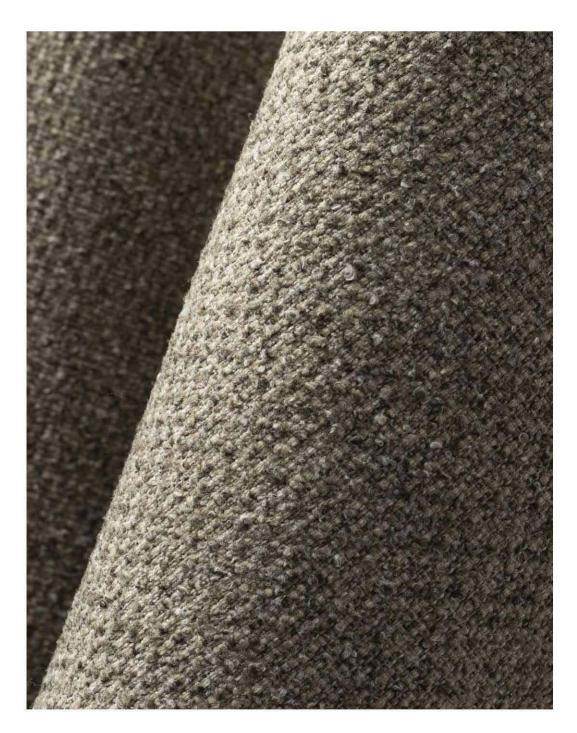





Witteveen Projectinrichting Ouderkerk a/d Amstel Tel: 020 - 496 5030 info@witteveen.nl www.vergadertafel.info www.project-inrichting.nl







Society

This sustainable bouclé textile has a luxurious look & feel. Our product development team created this fabric together with a weaver who is known for his unique recycled polypropylene.

This textile is made from 100% recycled polypropylene, a special type of polypropylene, coming from leftovers from diapers and masks. Society is multicoloured, soft with a rough and modern look.

Society fits all types of upholstery, so it can be applied widely, as loose covers as well as on tight-fitted furniture.

It is voluminous and has a comfortable handfeel. Society can be machine-washed at 30 degrees Celsius* without losing its characteristics.

Kindly note that Society has a light hairy and woolen look, during use this hairiness can become more visible. This can be taken away with a pilling machine and has no further influence on the durability of this textile.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture, slightly damp, after washing.

Fabraa Upholstery fabrics with a conscience. We make sustainable choices easy by offering a wide range of high-qualty, affordable upholstery fabrics with consideration for the conditions throughout the supply chain.

Composition

/ faceside 100%RPP / backside n/a / flatweave

Suitable for

Standaard LOLA stofkleuren



Please note: colours may vary according to your screen settings.



Society - Article passport A sustainable boucle textile with a luxurious look & feel. Available from stock in a wide range of contemporary and commercial colours. **Product characteristics** Productgroup Applications sofa's, beds, chairs with fitted and loose fitting upholstery Composition faceside 100%RPP Composition backside n/a Bonding / Coating 54077300 Statistic code Dyeing method yarn dyed Available colours 17 Packaging transparent plastic

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09	
				Dry	Wet	DGM	DGM+		
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	сть	cycles	45.000		min. 12.000	min. 16.000	A	
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4		min. 3-4	min. 4	В	
Colour fastness to light	DIN EN ISO 105-B02:2014-11. Process 3, exposure level 5								
	light colours	CTL	grade		5	min. 4	min.5	В	
	middle colours	CTL	grade	5		min. 4	min.5	В	
	dark colours	CTL	grade	5		min. 4	min.5	В	
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11								
	light colours	СТL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	middle colours	CTL	grade	5	.5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	dark colours	CTL	grade	4-5	4-5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
gnitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	СТ		passed					

Processing specifications								
Minimum workable width in centimeters	± 138							
Roll length in meters	± 40							
Material weight in grams per linear meter	± 588							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	903	1.375	min. 350	min. 400	A/A
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	148,0	140,4	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	2,2	2,2	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a
Chemical substances	REACH	Centexbel		passed			•	
	Oeko-Tex, product class II	Centexbel		certified				

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	96	0,0	0,0	n/a	n/a	A/A


























Textaafoam b.v. La Défense 11 | 5026 SC Tilburg P.O. Box 12 | 5050 AA Goirle The Netherlands T +31(0)13 534 5934 F +31(0)13 534 7586 E info@fabraa.com www.fabraa.com Witteveen Projectinrichting Ouderkerk a/d Amstel Tel: 020 - 496 5030 info@witteveen.nl www.vergadertafel.info www.project-inrichting.nl