

TREVIRA

Composition: 100% POLYESTER TREVIRA CS
Weight: 340 g/m2
Light fastness: Scale 6 (blue scale) Xenotest
Abrasion resistance: 100.000 (rubs) Martindale
Cleaning washing:



Fire resistance:

C1	CRIB5	BS 7176 MH	M1	NF D 60013 (AM 18)	B1	EN 1021/1-2	IMO A 652 (16)
----	-------	------------	----	--------------------	----	-------------	----------------



FLEX

Composition: 100% POLYESTER TREVIRA CS
Weight: 300 g/m2
Light fastness: Scale 6 (blue scale) Xenotest
Abrasion resistance: 100.000 (rubs) Martindale
Cleaning washing:




Fire resistance:

C1	CRIB5	BS 7176 MH	M1	NF D 60013 (AM 18)	B1	EN 1021/1-2	IMO A 652 (16)
----	-------	------------	----	--------------------	----	-------------	----------------




TREVIRA BLEND

Composition: 100% POLYESTER TREVIRA CS
Weight: 420 g/m2
Light fastness: Scale 6 (blue scale) Xenotest
Abrasion resistance: 100.000 (rubs) Martindale
Cleaning washing:



Fire resistance:

C1	CRIB5	M1	B1	EN 1021/1-2	BS 7176 MH	NF D 60013 (AM18)	IMO A 652 (16)
----	-------	----	----	-------------	------------	-------------------	----------------

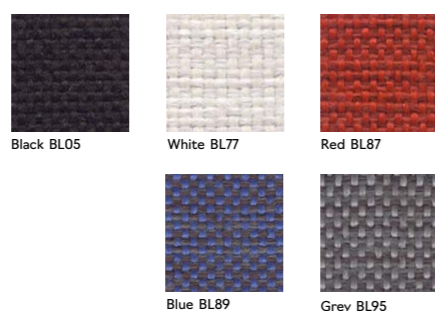

Witteveen Projectinrichting
Ouderkerk a/d Amstel
Tel: 020 - 496 5030
info@witteveen.nl
www.zadelstoel.nl
www.project-inrichting.nl

STAMSKIN

Composition: Stamskin TOP F 4340, backing Polyamide-jersey, coating antimicrobial and anti-fungal treatment
Weight: 780 g/m2
Light fastness: Scale 7
Abrasion resistance: > 120.000 rubs Martindale
Advantages: Urine-, blood-, sweat, fungal and waterproof, manufactured to environmentally friendly standards ISO 14001
Cleaning: With brush, water and soap, rinse of with water, do not clean with stainremovers containing solvents or oily products
N°528/2012/CE-Folpet: Stamskin Top contains the biocidal product Folpet, an antifungal additive used to help maintaining appearance, physical properties and prolong the service of these articles.

Flame retardant:

UK: BS 5852	D: DIN 53438/T2	F: NFP 92.507
-------------	-----------------	---------------



PUxx

Composition: PUxx no. 1, 100% Polyurethane, backing polyester cotton mixture, free from Phthalate and PVC.
Weight: ± 520 g/m2
Light fastness: 6-7 (8 is excellent)
Abrasion resistance: > 300.000 Martindale
Advantages: PUxx nr. 1 is free of Phthalate and PVC and OEKO-TEX certified. 100% waterproof. Urine and blood resistant. Extremely scratch resistant surface. Easily transport for heat (no sweat feeling). PUxx no. 1 is easy to clean and disinfect. It is resistant to most cleaning agents and disinfectants (based on alcohol, chlorine and ammonia). Do not use solvents.
Cleaning:

Flame retardant:

GB BS 5852 Crib 5	EN 1021 1-2	CALL117-2013	IMO 2010 FTP: part 8	D DIN 4102 B1 (available on request only)
-------------------	-------------	--------------	----------------------	---



LEATHERETTE

Composition: Backing Cotton Jersey, coating fire retardant plasticised PVC
Weight: 590 g/m2
Light fastness: ISO105 >6
Cleaning: Clean material with humid cloth and householdsoap. Do not use cleaning materials that contain solvents.

Flame retardant:

FMVSS 302 (= 95/28/EG IV, R118)	b, EN1021 1+2
---------------------------------	---------------




ESD DRALON

Composition: Dralon-Bekinox
Weight: 560 g/m2
Colour fastness: Scale 5-8
Abrasion resistance: 500.000 rubs Martindale
Cleaning: With a damp cloth, do not use bleach




ESD LEATHERETTE

Composition: PVC Compound/CO/RES
Weight: 630 g/m2, ± 50 g/m2 knitted fabric
Colour fastness: Scale 6-8
Cleaning: With a damp cloth, do not use bleach




INDUSTRY OFFICE MEDICAL DENTAL
UPHOLSTERY

Stamskin

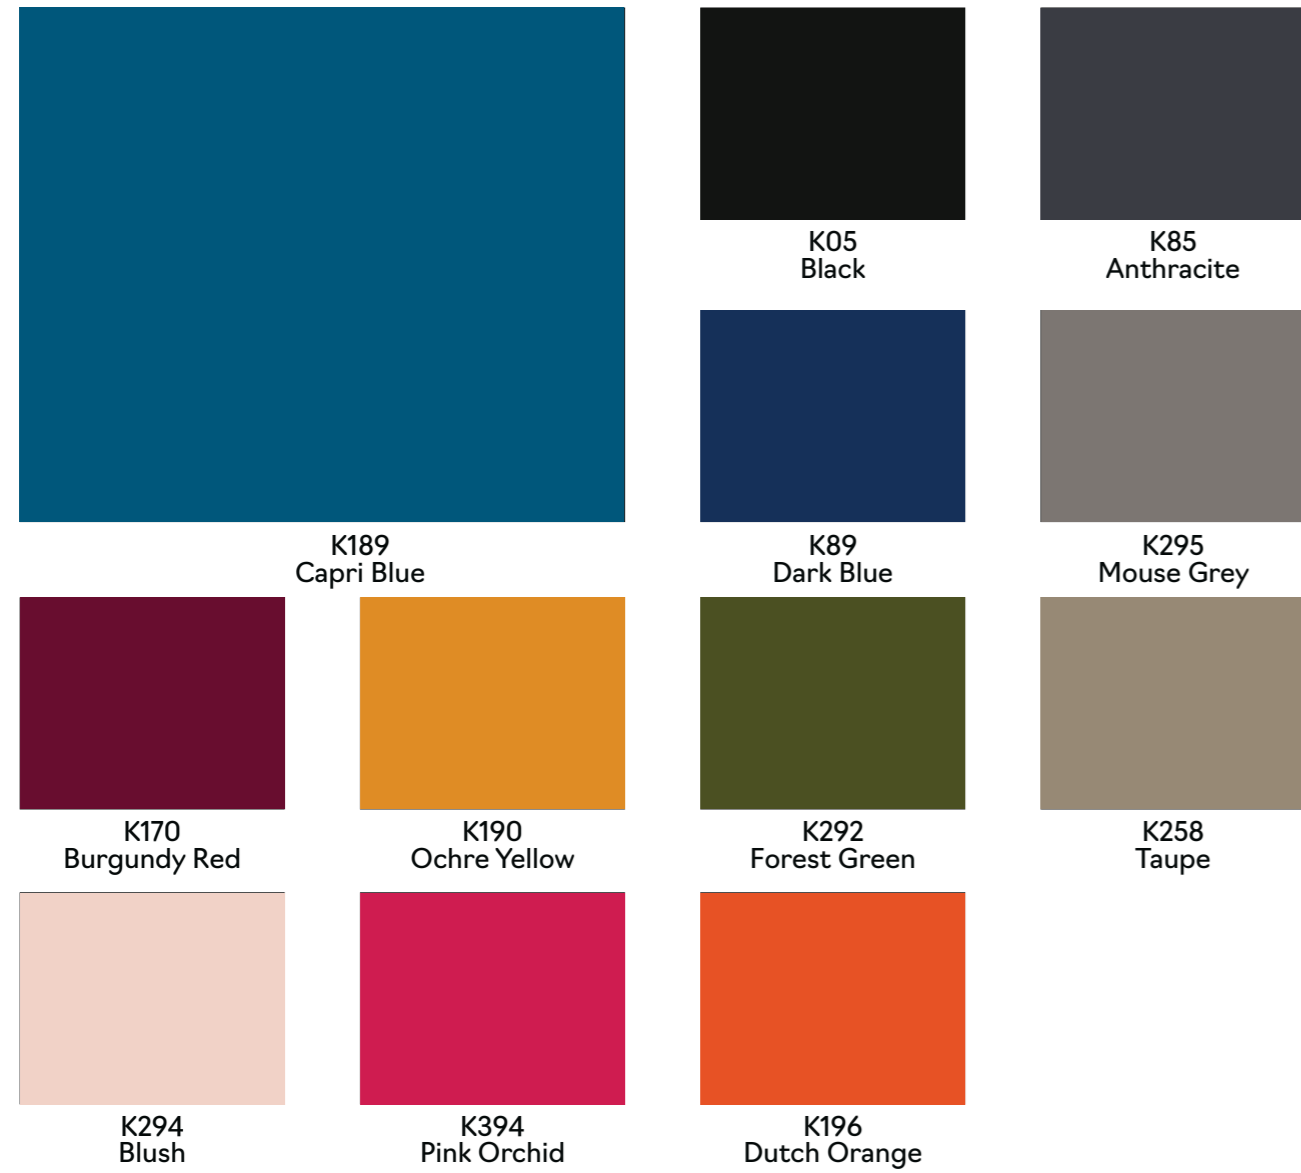


All Stamskin colours can be combined with each other to form bicolor colors



PUxx

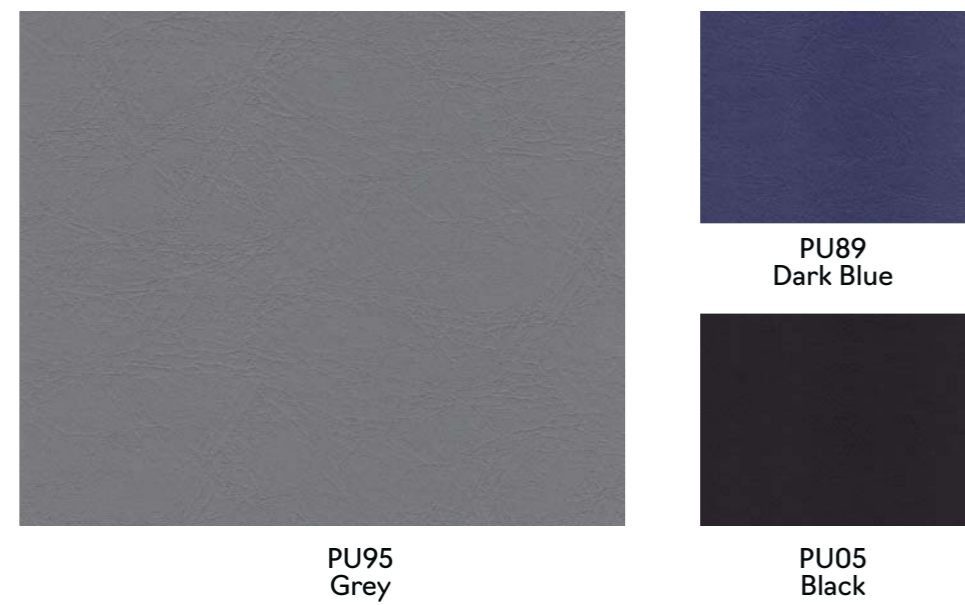


Leatherette

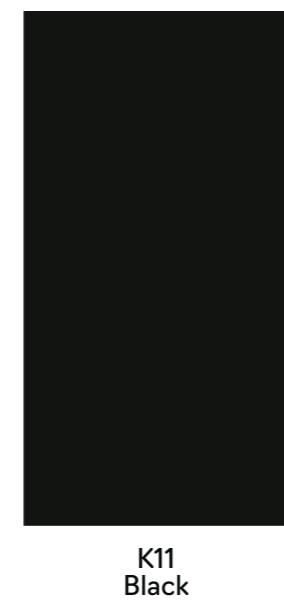


Flex

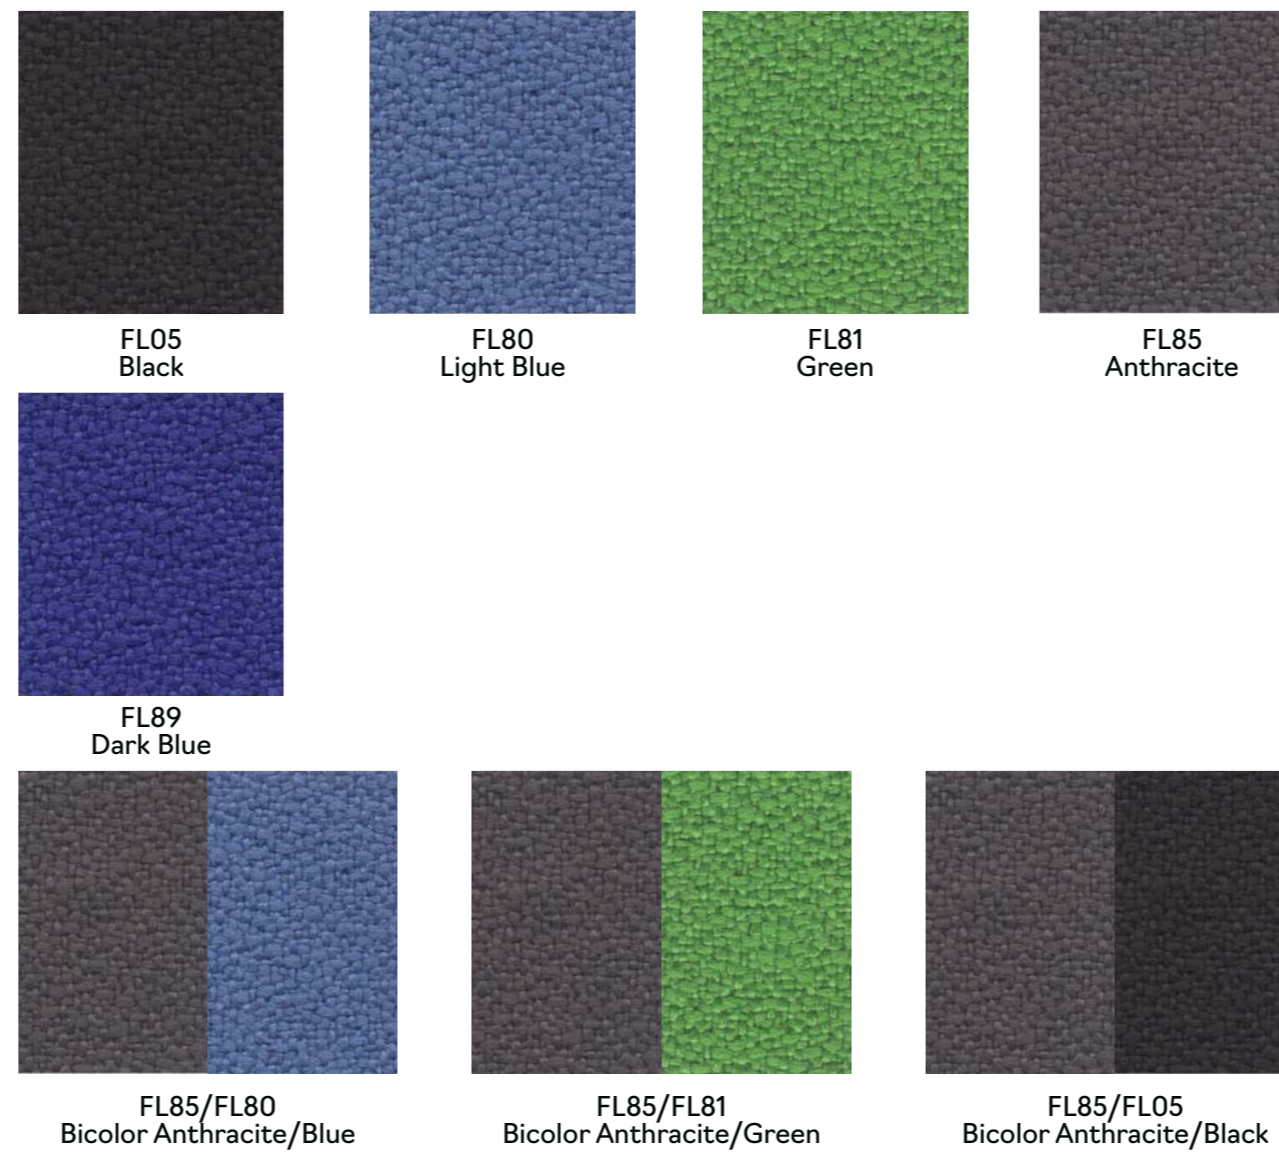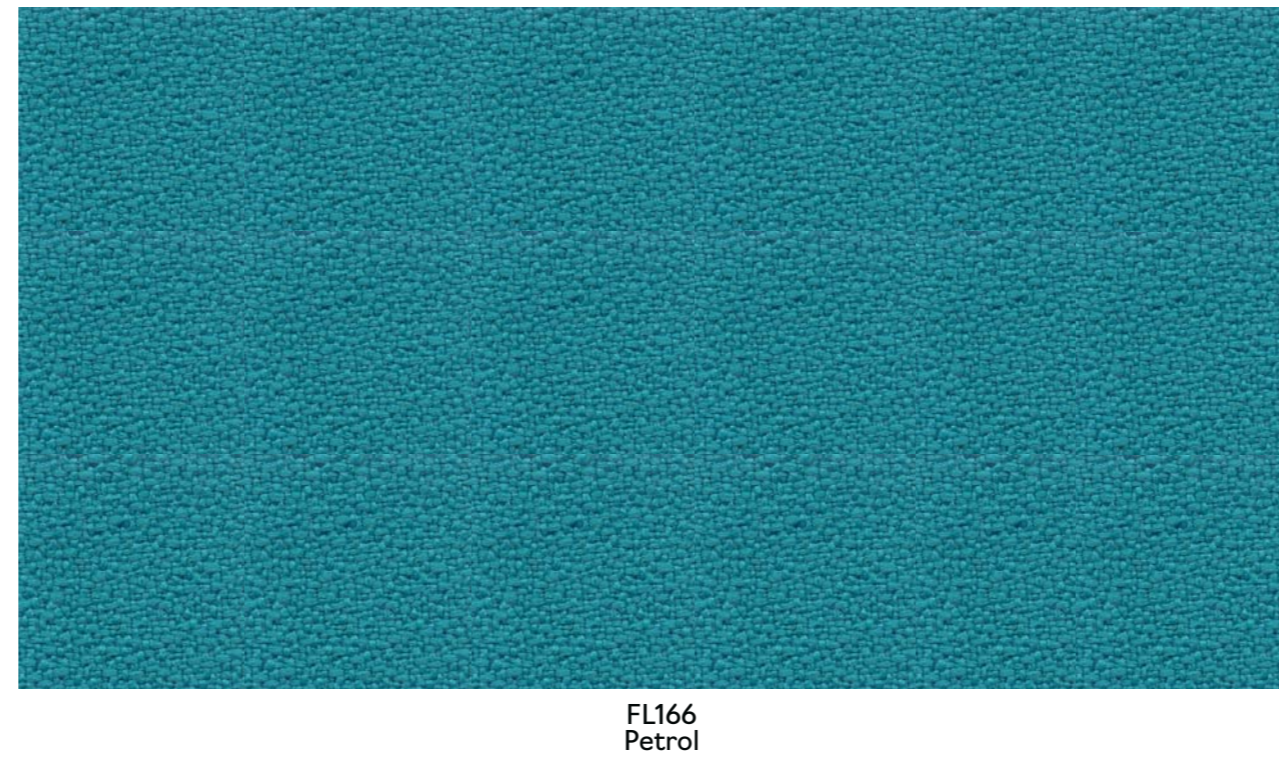

Blend

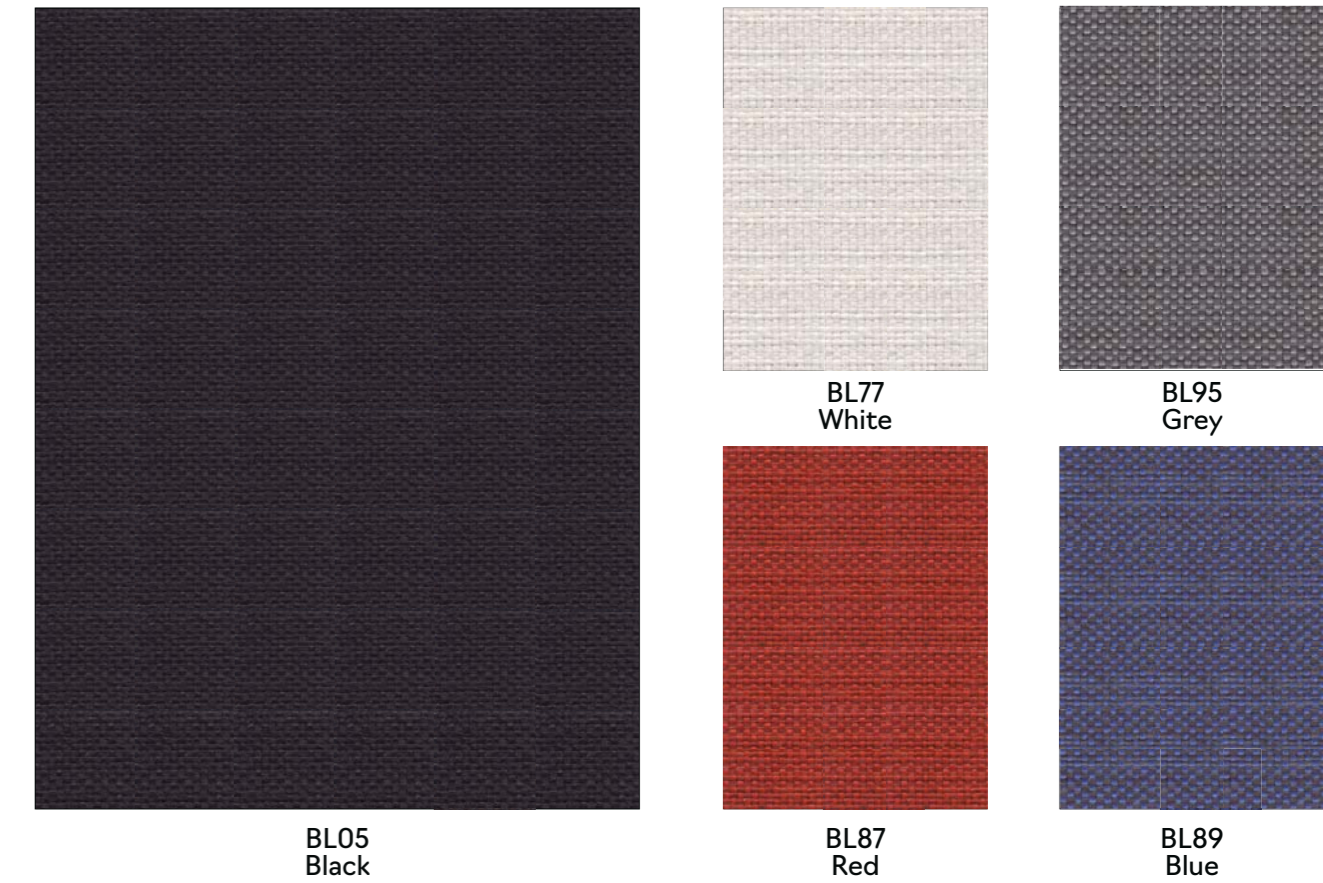

Trevira

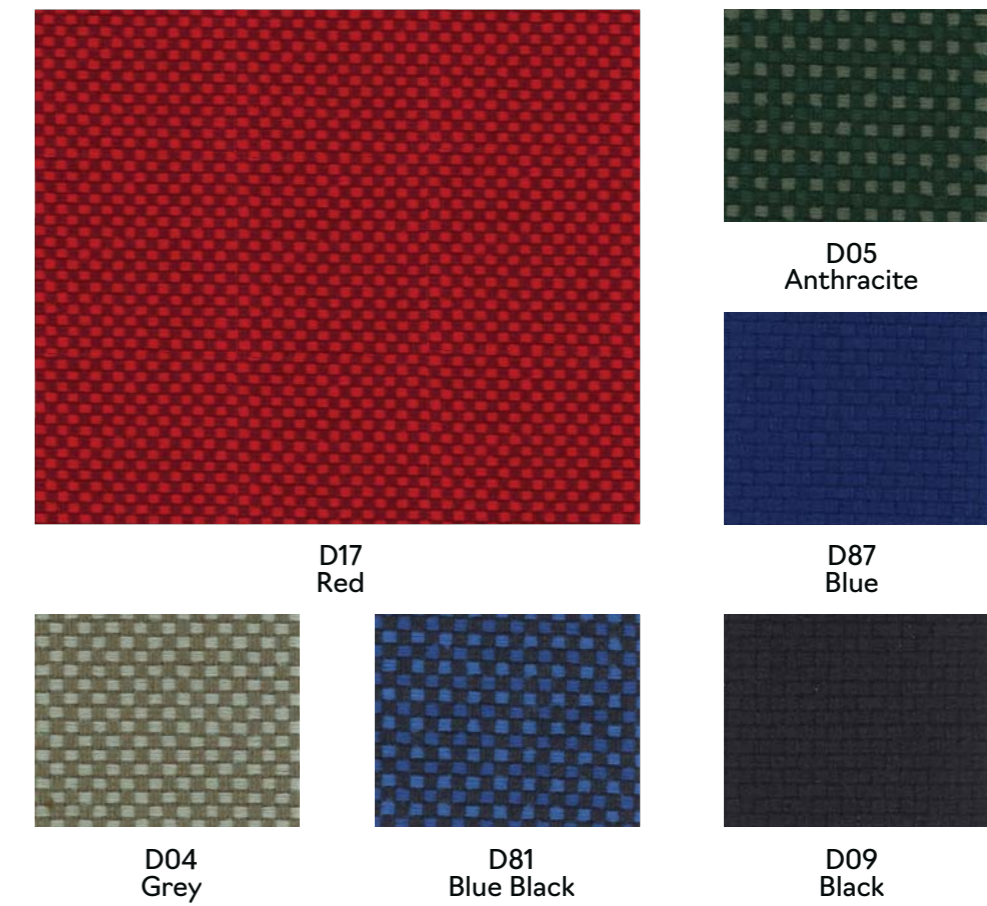

ESD

